

## TR-CONTROL

### Addressable Notification Module

#### GENERAL

The TR-CONTROL is an addressable notification module for use with Triga Series fire alarm control panels (FACPs). The TR-CONTROL gives you the flexibility to add notification circuits wherever they are needed on a Triga FACP signaling line circuit (SLC) loop.

The TR-CONTROL provides supervised monitoring of wiring to load devices that require an external power supply to operate, such as bells, horns, and strobes. It is capable of Class B and Class A supervision.

Upon command from the FACP, the TR-CONTROL will disconnect the supervision and connect the external power supply across the load device. The disconnection of the supervision provides a positive indication to the panel that the control relay actually turned on. The external power supply is always relay isolated from the SLC loop, so that a trouble condition on the power supply will never interfere with the rest of the system.


#### INSTALLATION

The TR-CONTROL mounts directly into a 4" square electrical box. The box must have a minimum depth of 2-1/8". A surface mount electrical box (TR-SMB500) is available from Triga.

#### COMPATIBILITY

The TR-CONTROL is compatible with the following Triga Series FACPs:

- TR-2100R / TR-2100B
- TR-2100ECSR / TR-2100ECSB
- TR-R2100R / TR-R2100B

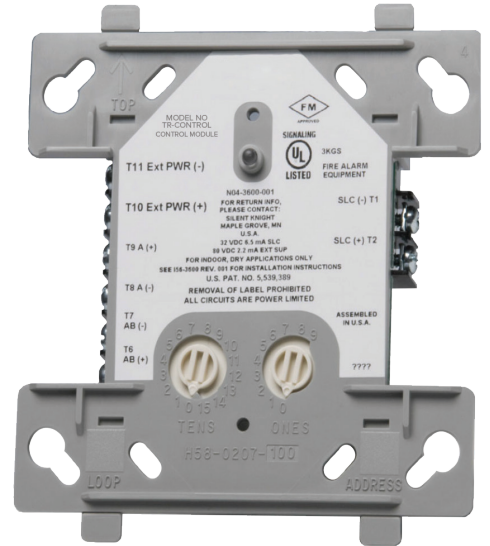

TR-Control Module

## FEATURES & BENEFITS

- Flexible solution for adding notification circuits where needed
- Support for Class B (style Y) or Class A (style Z) wiring
- Panel controlled status LED that flashes green in normal state and is solid red in alarm
- Polling LED visible through the cover plate
- Rotary address switches for fast installation
- SEMS screws for easy wiring
- UL Listed
- FM Approved



## Technical Specifications

### PHYSICAL

**Dimensions:** 4.5" H x 4"W x 1.25" D

**Shipping Weight:** 6.3oz (196g)

### ENVIRONMENTAL

**Operating Temperature:** 32°F to 120°F (0°C to 49°C)

**Humidity:** 10% to 93% relative humidity  
(noncondensing)

### ELECTRICAL

**Operating Voltage:** 15 to 32VDC

**End-of-Line Resistance:** 47k

**SLC Loop Impedance:** 40

**Standby Current:** 1.3mA

**Alarm Current:** 6.5mA

### ACCESSORIES

**TR-SMB500:** 4" Square Surface Mount Electrical Box

**TR-CB500:** Module Barrier. Used to separate power limited and non-power limited wiring in a junction box

### AGENCY LISTINGS

NFPA 13, NFPA 70, NFPA 72, UL 2572, UL 1711 &

UL 864: Local Protective Signaling Systems

UL Listed

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

**TRIGA INVESTMENTS, LLC**  
340 Taxiway Bravo Beeville, TX 78102,  
Tel: +1330-577-5199. Email: info@trigaglobal.com